


## ▶ Spring Steel Beam Clamp

**Standard:** UL 2239 and CSA C22.2 No. 18.4-04

**Material:** Spring Steel

**Application:** Fits beam flange up to 1/2" to support a variety of attachments from beams

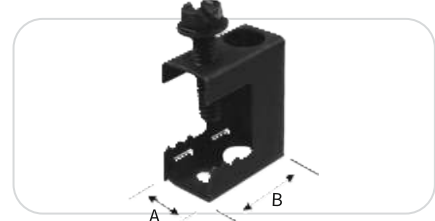

EVT#	Trade Size	Load Rating	Master QTY	Dim A (inch)	Dim B (inch)
SSBC	3/4" Jaw	100 LBS	100	0.626	1.184

## ▶ Pipe Clamp with Rubber

**Standard:** UL 2239 and CSA C22.2 No. 18.4-04

**Material:** Steel

**Application:** mounting element with rubber insulation for EMT, IMC and Rigid



EVT#	Trade Size	Shelf QTY	Master QTY	Top Thread	OD RANGE
2401	1/2"	20	200	M8+M10	17-23
2402	3/4"	16	160	M8+M10	23-29
2403	1"	16	160	M8+M10	29-35
2404	1-1/4"	10	100	M8+M10	37-43
2405	1-1/2"	10	100	M8+M10	43-49
2406	2"	10	100	M8+M10	55-61
2407	2-1/2"	*	*	M8+M10	70-75
2408	3"	*	*	M8+M10	85-90
2409	3-1/2"	*	*	M8+M10	99-103
2410	4"	*	*	M8+M10	110-115

## ▶ Conduit Hanger

**Standard:** UL 2239 and CSA C22.2 No. 18.4-04

**Material:** Steel

**Application:** for use to suspend conduit from overhead supports



EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
2201	1/2"	1	400	1.878	0.751
2202	3/4"	1	400	2.125	0.751
2203	1"	1	300	2.435	0.875
2204	1-1/4"	1	300	2.752	0.875
2205	1-1/2"	1	50	3.125	1.000
2206	2"	1	50	3.875	1.000
2207	2-1/2"	1	50	4.625	1.250
2208	3"	1	25	5.500	1.250
2209	3-1/2"	1	25	5.752	1.250
2210	4"	1	10	6.245	1.250

## ▶ Conduit Fastener

**Standard:** UL 2239 and CSA C22.2 No. 18.4-04

**Material:** Spring Steel

**Application:** provides for fast and easy installation with pliers



EVT#	Trade Size	Shelf QTY	Master QTY	Vertical Load	Horizontal Load
E1	1/2" & 3/4"	1	800	100 LBS	25 LBS
E2	1"	1	500	100 LBS	25 LBS
E3	1-1/4"	1	250	100 LBS	25 LBS
E4	1-1/2"	1	250	100 LBS	25 LBS
E5	2"	1	250	100 LBS	25 LBS