


▶ Conduit Strap Back Spacer

Standard: UL 2239 and CSA C22.2 No. 18.4-04

Material: Malleable Iron

Application: for use with one hole strap to provide space between conduit and mounting surface

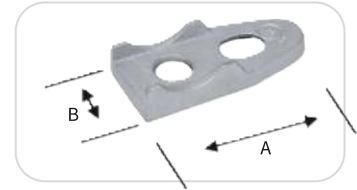


EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
MB01	1/2"	1	250	2.055	1.000
MB02	3/4"	1	250	2.382	1.061
MB03	1"	1	250	2.942	1.252
MB04	1-1/4"	1	100	3.500	1.880
MB05	1-1/2"	1	100	3.805	1.440
MB06	2"	1	50	4.751	1.936
MB07	2-1/2"	1	25	5.752	2.445
MB08	3"	1	10	6.688	2.625
MB10	4"	1	10	8.880	3.062

▶ Conduit Lock Nut

Standard: UL 514B and C22.2 No. 18.3-12

Material: Steel

Application: for securing Rigid, IMC conduit or any threaded fitting to a box or enclosure




EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
A1	1/2"	400	4000	1.148	0.787
A2	3/4"	200	2000	1.452	0.988
A3	1"	150	1500	1.747	1.260
A4	1-1/4"	80	800	2.100	1.594
A5	1-1/2"	50	500	2.400	1.835
A6	2"	40	400	2.952	2.318
A7	2-1/2"	1	400	3.546	2.776
A8	3"	1	200	3.551	3.454
A9	3-1/2"	1	200	4.200	3.895
A10	4"	1	200	4.749	4.445

▶ Conduit Bushing

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use with locknut to terminate Rigid or IMC conduit to a box or enclosure



EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
Q1	1/2"	150	1500	1.051	0.788
Q2	3/4"	100	1000	1.325	0.984
Q3	1"	50	500	1.585	1.260
Q4	1-1/4"	50	500	1.950	1.594
Q5	1-1/2"	35	350	2.200	1.831
Q6	2"	20	200	2.695	2.323
Q7	2-1/2"	1	200	3.235	2.776
Q8	3"	1	150	3.885	3.465
Q9	3-1/2"	1	100	4.360	3.895
Q10	4"	1	80	5.010	4.448