


▶ Rigid Conduit Body - C Style

Standard: UL 514A and CSA C22.2. No. 18.1-13

Material: Aluminum

Application: for rigid conduit or IMC, allow access for inspection, pulling and maintenance

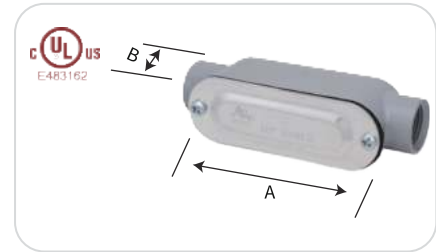


EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
C01	1/2"	1	100	3.504	1.378
C02	3/4"	1	50	4.154	1.614
C03	1"	1	50	4.921	1.890
C04	1-1/4"	1	20	6.496	2.496
C05	1-1/2"	1	20	6.496	2.496
C06	2"	1	10	8.563	3.346

▶ Rigid Conduit Body - T Style

Standard: UL 514A and CSA C22.2. No. 18.1-13

Material: Aluminum

Application: for rigid conduit or IMC, allow access for inspection, pulling and maintenance

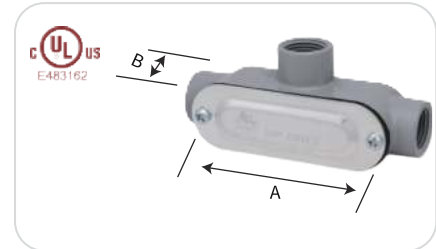


EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
T01	1/2"	1	100	3.504	1.378
T02	3/4"	1	50	4.154	1.614
T03	1"	1	50	4.921	1.890
T04	1-1/4"	1	20	6.496	2.496
T05	1-1/2"	1	20	6.496	2.496
T06	2"	1	10	8.563	3.346

▶ EMT Conduit Body - LB Style

Standard: UL 514A and CSA C22.2. No. 18.1-13

Material: Aluminum

Application: for EMT, allow access for inspection, pulling and maintenance

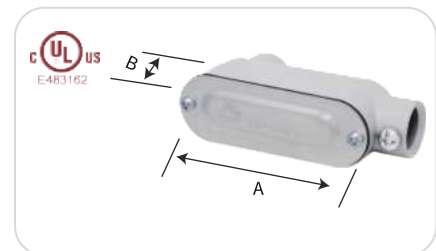

EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
ELB01	1/2"	1	100	3.504	1.378
ELB02	3/4"	1	50	4.154	1.614
ELB03	1"	1	50	4.921	1.890
ELB04	1-1/4"	1	20	6.496	2.496
ELB05	1-1/2"	1	20	6.496	2.496
ELB06	2"	1	10	8.563	3.346