


▶ Two Screw Strap Type Connector

Standard: UL 514B and C22.2 No. 18.3-12

Material: Aluminum

Application: use to connect flexible metallic conduit, AC and MC cable to a box or enclosure

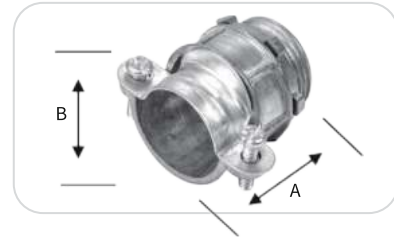

EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
D11	1/2"	100	1000	1.435	0.63~0.81
D12	3/4"	50	500	1.500	0.83~1.09
D13	1"	25	250	1.750	1.00~1.36

▶ Split Bolt Connector

Standard: UL 467 and CSA C22.2 No.41

Material: Brass

Application: for use on copper conductors



EVT#	Trade Size	Shelf QTY	Master QTY	Range(Min)	Range(Max)
SBC01	10--16	1	500	16 STR	10 STR
SBC02	8--12	1	500	12 STR	8 STR
SBC03	6--10	1	500	10 SOL	6 SOL
SBC04	4--8	1	500	8 SOL	4 SOL
SBC06	2 (strand)	1	250	6 SOL	2 STR
SBC07	1/0	1	100	4 SOL	1/0 STR
SBC08	2/0	1	100	2 SOL	2/0 STR
SBC09	3/0	1	100	2 SOL	3/0 STR
SBC10	4/0	1	100	4/0 SOL	250 MCM

▶ Conector Perno Partido Con Espiga

Standard: UL 467 and CSA C22.2 No.41

Material: Brass

Application: for use on copper conductors



EVT#	Trade Size	Shelf QTY	Master QTY	Corredera
SBC11	8-6	1	500	AWG 7/32"
SBC12	6-3	1	500	AWG 1/4"
SBC13	3-2	1	250	AWG 5/16"
SBC14	2-1/0	1	100	AWG 3/8"