


▶ U Bolt

Material: Steel

Application: for use to run and support EMT,IMC and Rigid in electrical systems

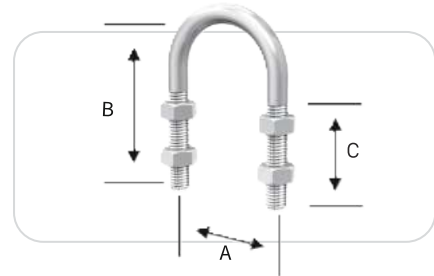


EVT#	Trade Size	Thread Size	Dim A		Dim B		Dim C	
			Inch	mm	Inch	mm	Inch	mm
U1	1/2"	5/16"-18	1.25	31.75	2.38	60.45	1.50	38.10
U2	3/4"	5/16"-18	1.44	36.58	2.75	69.85	1.50	38.10
U3	1"	5/16"-18	1.69	42.93	3.00	76.20	1.50	38.10
U4	1-1/4"	5/16"-18	2.06	52.32	3.13	79.50	1.50	38.10
U5	1-1/2"	5/16"-18	2.31	58.67	3.50	88.90	1.50	38.10
U6	2"	3/8"-16	2.81	71.37	4.38	111.25	1.88	47.75
U7	2-1/2"	3/8"-16	3.38	85.85	4.75	120.65	1.88	47.75
U8	3"	3/8"-16	4.00	101.60	5.38	136.65	1.88	47.75
U9	3-1/2"	3/8"-16	4.50	114.30	5.75	146.05	1.88	47.75
U10	4"	3/8"-16	5.00	127.00	6.63	168.40	1.88	47.75

▶ Strut Clamp

Standard: UL 2239 and CSA C22.2 No. 18.4-04

Material: Steel

Application: for use to support EMT, Rigid or IMC conduit to the strut channel

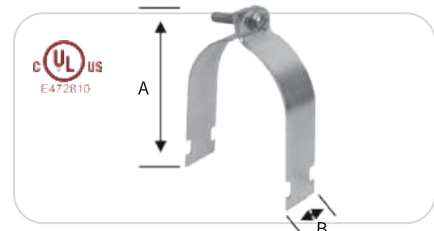


EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
2101	1/2"	75	300	2.302	1.241
2102	3/4"	75	300	2.458	1.241
2103	1"	50	200	2.680	1.241
2104	1-1/4"	50	200	3.210	1.241
2105	1-1/2"	50	200	3.415	1.241
2106	2"	100	200	4.000	1.241
2107	2-1/2"	75	150	5.000	1.241
2108	3"	75	150	5.555	1.241
2109	3-1/2"	*	*	6.000	1.241
2110	4"	40	80	6.500	1.241

▶ RC Clamp

Material: Steel

Application: for use to support EMT and Conduits to the Riel RC 19X35

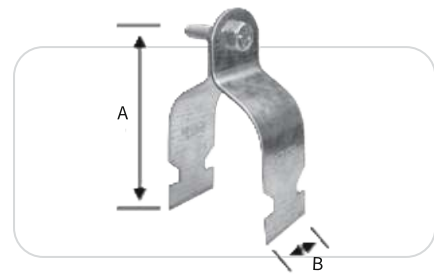

EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
2101RC	1/2"	1	600	1.984	1.024
2102RC	3/4"	1	600	2.283	1.024
2103RC	1"	1	500	2.626	1.024
2104RC	1-1/4"	1	350	3.055	1.024
2105RC	1-1/2"	1	350	3.181	1.024
2106RC	2"	1	300	3.780	1.024
2107RC	2-1/2"	*	*	4.488	1.024
2108RC	3"	*	*	5.197	1.024
2110RC	4"	*	*	*	1.024